

# Emergency lamps


## VEGA

### DIMENSIONS (mm)


### CONNECTION DIAGRAM

Not extractable emergency lamp, with installation on flush-mounting boxes that turns on in the event of a blackout to illuminate the environments where it is installed. Vega is small and compact and is supplied with the adapters that allow its installation with the plates of the main civil series.


- 1 Installation in flush-mounting box with a height of 45 mm
- 2 Terminals on the back of the device for power supply connection
- 3 Red led for low battery indication

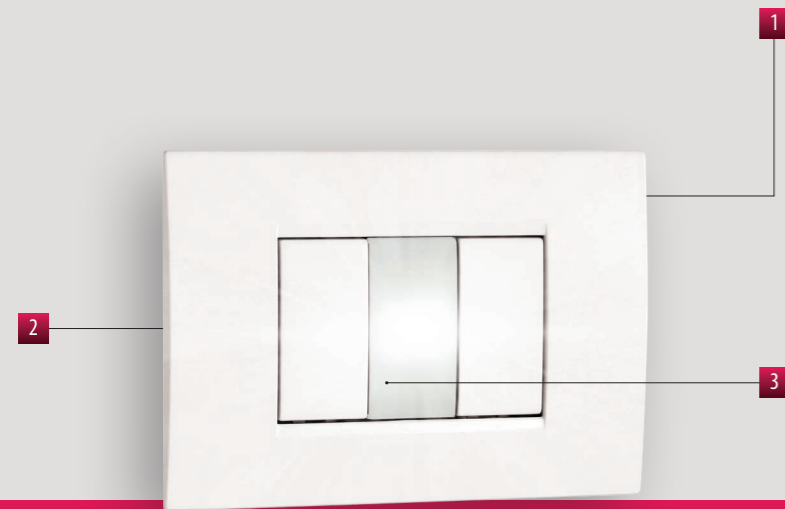


#### Front view



#### Side view

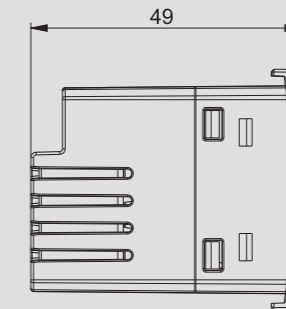

#### Diagram



## COMPLEMENTS FOR CIVIL SERIES

### NOT EXTRACTABLE EMERGENCY LAMP

- Light source: 1 white led
- Backup battery:
  - 1 3.6V NiMH rechargeable battery 140 mAh (not replaceable)
  - full-charge time: 48 hours
- Operating autonomy: approximately 2 hours
- Compact size: only 1 module occupied in the flush-mounting box
- Adapters that allow adaptability with the main civil series (see "Adaptable plates") included in the package

#### Adaptable plates

- |                                     |                        |
|-------------------------------------|------------------------|
| ABB Mylos series                    | Gewiss Chorus series   |
| Ave S44 series                      | Vimar Arké series      |
| Bticino Axolute series              | Vimar Eikon series     |
| Bticino Axolute Air series          | Vimar Eikon Evo series |
| Bticino Light series                | Vimar Plana series     |
| Bticino Living International series |                        |
| Bticino LivingLight series (LL)     |                        |
| Bticino LivingLight Air series      |                        |
| Bticino Matix series                |                        |

For information on the possibility of using different plates contact the technical assistance service



### TECHNICAL INFORMATION

#### GENERAL CHARACTERISTICS

Power supply	V AC	230 (-15% ÷ +10%)
Frequency	Hz	50/60
Fastened		flush
Maximum cables section	mm <sup>2</sup>	1.5
Light source		1 white led
Luminous intensity	mcd	2400
Emission angle		120°
Backup battery		
Full-charge time	h	48
Autonomy	h	2
Operating temperature	°C	0 ÷ 40
Storage temperature	°C	-20 ÷ 40
Operating humidity	RH	20% ÷ 90%
		non condensing
Protection degree		IP40

#### REFERENCE STANDARDS

Compliance with Community Directives: 2014/35/EU (LVD) and 2014/30/EU (EMCD) is declared with reference to the following standards: EN 60598-1 • EN 60598-2-2 • EN 61000-6-1 • EN 61000-6-3

Code	Model	Description	Colour	Power supply
VE758300	Vega	Flush-mounting not extractable emergency lamp	Opal white	230 V~