

Step marker lamps with twilight sensor


MUVY

DIMENSIONS (mm)


CONNECTION DIAGRAM

Step marker lamp with twilight sensor and movement detector that turns on in low light conditions when people or animals move within the detection range. Muvy is small and compact to be installed with discretion in the flush-mounting boxes and is supplied with adapters that allow installation with the plates of the main civil series.


- 1 Installation on flush-mounting boxes with a height of 45 mm
- 2 Terminals on the back of the device for power supply connection
- 3 Movement and twilight sensor

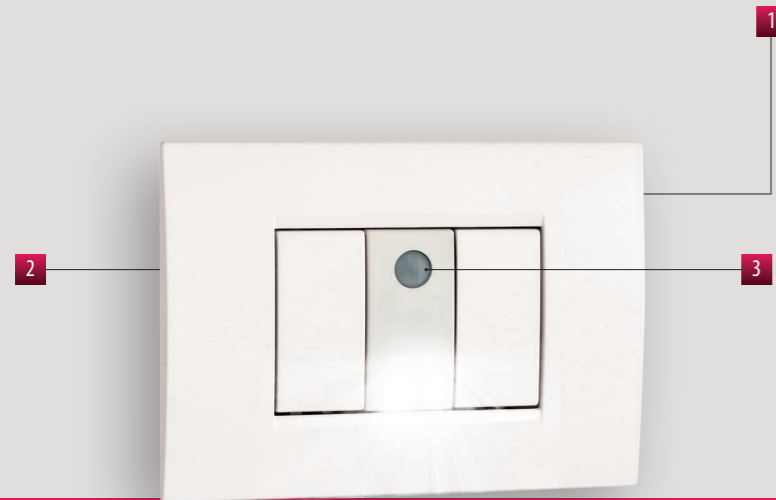


Front view



Side view



Diagram



COMPLEMENTS FOR CIVIL SERIES


NOT EXTRACTABLE STEP MARKER LAMP WITH TWILIGHT SENSOR

- Light source: 1 white led
- Intervention brightness fixed at 30 lux and not modifiable
- Intervention time fixed at 30 seconds (if a new movement is detected during the timing, the count restarts)
- Compact size: only 1 module occupied in the flush-mounting box
- Adapters that allow adaptability with the main civil series (see "Adaptable plates") included in the package

Adaptable plates

- | | |
|-------------------------------------|------------------------|
| ABB Mylos series | Gewiss Chorus series |
| Ave S44 series | Vimar Arké series |
| Bticino Axolute series | Vimar Eikon series |
| Bticino Axolute Air series | Vimar Eikon Evo series |
| Bticino Light series | Vimar Plana series |
| Bticino Living International series | |
| Bticino LivingLight series (LL) | |
| Bticino LivingLight Air series | |
| Bticino Matix series | |

For information on the possibility of using different plates contact the technical assistance service

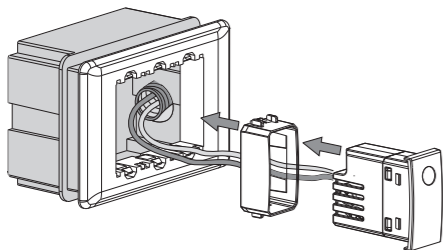

TECHNICAL INFORMATION

GENERAL CHARACTERISTICS

Power supply	V AC	115 ÷ 230 (-15% ÷ +10%)
Frequency	Hz	50/60
Absorption	VA (W)	2.5 (0.6)
Mounting		flush
Maximum cables section	mm ²	1.5
Intervention luminosity	lux	30
Detection angle		110° at 20°C
Detection range		7m at 20°C
Intervention time	s	30
Light source		
Luminous intensity	lm	10
Operating temperature	°C	0 ÷ 50
Storage temperature	°C	-20 ÷ +60
Operating humidity	RH	20% ÷ 90%
		non condensing
Protection degree		IP40

REFERENCE STANDARDS

Compliance with the Community Directives: 2014/35/EU (LVD) and 2014/30/EU (EMCD) is declared in reference to the following harmonized standards: EN 60598-1 • EN 60598-2-2 • EN 61000-6-1 • EN 61000-6-3

Code	Model	Description	Colour	Power supply
VE770600	Muvy	Step marker lamp with twilight sensor and movement detector	Opal white	230 V~



MUVY-ENG-072019

