
DIMENSIONS (mm) CONNECTION DIAGRAM

Side view


Not extractable step marker lamp that turns on and stays on only when the power is on.


Muvy is small and compact to be installed with discretion in the flush-mounting boxes of any room and is supplied with adapters that allow installation with the plates of the main civil series.

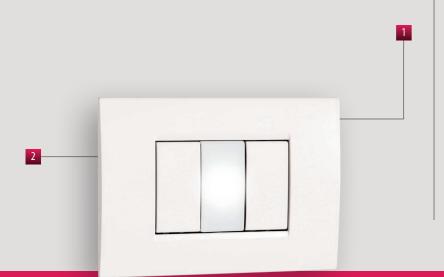


- 1 Installation on flush-mounting boxes with a height of 45 mm
- 2 Terminals on the back of the device for power supply connection








Diagram



External switch: lamp on/off

## LIGHT INDICATORS

- 3 models available, which differ in the colour of the light emitted: green, white, red
- The light turns on when the device is powered
- Compact size: only 1 module occupied in the flush-mounting box
- Adapters that allow adaptability with the main civil series (see "Adaptable plates") included in the package



### Adaptable plates

ABB Mylos series
Ave S44 series
Bticino Axolute series
Bticino Axolute Air series
Bticino Light series
Bticino Living International series
Bticino LivingLight series (LL)
Bticino LivingLight Air series
Bticino Matix series

For information on the possibility of using different plates contact the technical assistance service

Code	Model	Description	Colour	Power supply
VE771000	Mira Verde	Signaling lamp compact size	Green	230 V~
VE771100	Mira Bianca	Signaling lamp compact size	Opal white	230 V~
VE770900	Mira Rossa	Signaling lamp compact size	Red	230 V~



# **COMPLEMENTS FOR CIVIL SERIES**

## **TECHNICAL INFORMATION**

## **GENERAL CHARACTERISTICS**

Power supply	V AC	230 (-15% ÷ +10%)
Absorption	VA (W)	7 (0.5)
Frequency	Hz	50/60
Mounting		flush
Maximum cables section	mm <sup>2</sup>	1.5
Operating temperature	$^{\circ}$	0 ÷ 50
Storage temperature	°C	-10 ÷ +65
Operating humidity	RH	20% ÷ 90%
		non condensing
Protection degree		IP40

## **REFERENCE STANDARDS**

Compliance with the Community Directives: 2014/35/EU (LVD) and 2014/30/EU (EMCD) is declared in reference to the following harmonized standards: EN 60598-1 • EN 60598-2-2 • EN 61000-6-1 • EN 61000-6-3

