


# Sounds indicators

Phono is a flush-mounting not extractable ringtone with two types of sound. The first two sounds ringtone simulates the siren effect and is suitable, for example, for alarms in rooms such as bathrooms, etc., while the second three sounds ringtone reproduces the typical sound of a bell. Phono is small and compact to be installed with discretion in any environment and is supplied with the supports that allow the adaptation to the plates of the main civil series.

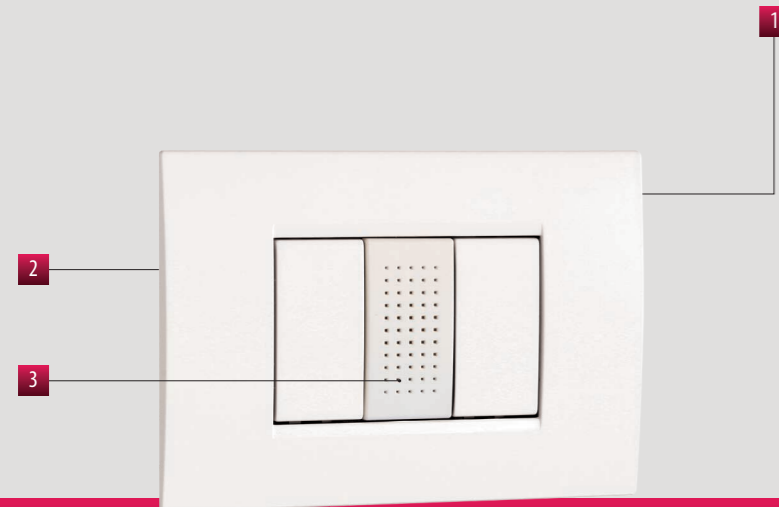


# PHONO


- 1 Installation in flush-mounting boxes with a height of 45 mm
- 2 Terminals on the back of the device for connection of the two external buttons with which to activate one or the other sound
- 3 Holes for tonal diffusion

# DIMENSIONS (mm)

Front view




Side view



# CONNECTION DIAGRAM

Diagram



# COMPLEMENTS FOR CIVIL SERIES


## SOUNDS INDICATORS

- 80 dB acoustic buzzer at a distance of 30 cm
- Compact size: 1 module only occupied in the flush-mounting box
- Adapters that allow adaptability with the main civil series (see "Adaptable plates") included in the package

### Adaptable plates

- |                                     |                        |
|-------------------------------------|------------------------|
| ABB Mylos series                    | Gewiss Chorus series   |
| Ave S44 series                      | Vimar Arké series      |
| Bticino Axolute series              | Vimar Eikon series     |
| Bticino Axolute Air series          | Vimar Eikon Evo series |
| Bticino Light series                | Vimar Plana series     |
| Bticino Living International series |                        |
| Bticino LivingLight series (LL)     |                        |
| Bticino LivingLight Air series      |                        |
| Bticino Matix series                |                        |

For information on the possibility of using different plates contact the technical assistance service

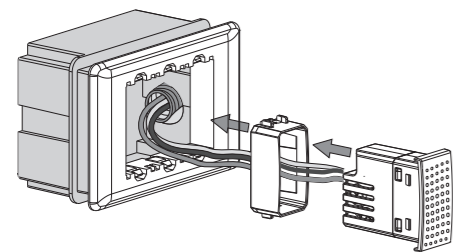


Code	Model	Description	Colour	Power supply
VE770300	Phono Grigia	Bitonal ringtone compact size	Grey	230 V~
VE770400	Phono Bianca	Bitonal ringtone compact size	White	230 V~
VE781100	Phono	Bitonal ringtone compact size	Silver Tech	230 V~

## TECHNICAL INFORMATION


### GENERAL CHARACTERISTICS

Power supply	V AC	230 (-15% ÷ +10%)
Frequency	Hz	50/60
Mounting		flush
Maximum cables section	mm <sup>2</sup>	1.5
Acoustic signal		80 dB at 30 cm
Operating temperature	°C	0 ÷ 50
Storage temperature	°C	-10 ÷ +60
Operating humidity	RH	20% ÷ 90%
		non condensing
Protection degree		IP40

- Pressing the key T1: two-tone sound (siren effect)

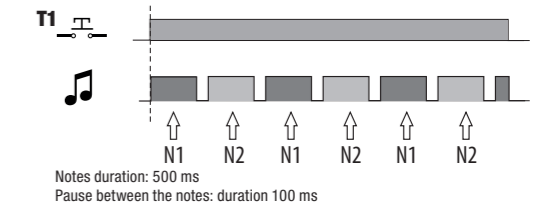

- Pressing the key T2: three-tone sound (bell effect)

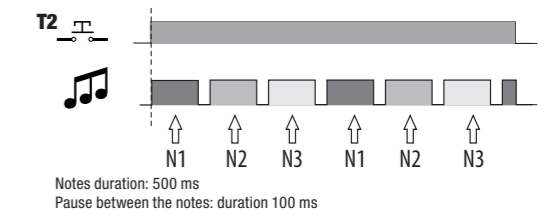

Note: if the keys T1 and T2 are pressed simultaneously, the sound relative to the key T1 is executed.

### REFERENCE STANDARDS

Compliance with the Community Directives: 2014/35/EU (LVD) and 2014/30/EU (EMCD) is declared in reference to the following harmonized standards: • EN 62080 • EN 61000-6-1 • EN 61000-6-3