

# Accessories for installation


PVC grommets. They electrically protect wires and cables passing through panels and ensure a good resistance against dust.

## Grommets with central perforated membrane


- Material: lead-free PVC and DEHP (complies with directive 2002/95/CE - RoHS)
- Colour: black
- Continuous operating temperature: -40°C ÷ +150°C
- Hardness: 50 shore A (ISO 768)

### Grommets central membrane cross - DIMENSIONS (mm)

Front view




Side view





### Grommets central perforated membrane - DIMENSIONS (mm)

Front view



Side view

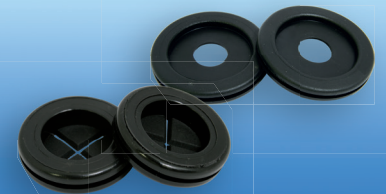

Cross	Code	Model	Hole diameter (A) for mounting (mm)	Maximum diameter grommet (D) mm	Hole diameter (d) cable passage (mm)	Sheet thickness (B) mm	Maximum thickness grommet (H) mm
	<a href="#">VE783000</a>	10481	27	35	22	2	8
	<a href="#">VE783100</a>	10723	21	28	16	2	8
	<a href="#">VE783200</a>	10731	28	34.5	21	1	8
<b>Perforated</b>							
	<a href="#">VE783300</a>	10670	15	19	4	1.5	8
	<a href="#">VE783400</a>	10671	15	19	4	3	9.5
	<a href="#">VE783500</a>	10672	15	19	4	4	10.5
	<a href="#">VE783600</a>	10680	21	28	6.5	2	8
	<a href="#">VE783700</a>	10681	21	28	6.5	3	9
	<a href="#">VE783800</a>	10682	21	28	6.5	4	10
	<a href="#">VE783900</a>	10689	21	28	11	3	9