

Accessories for installation


PVC grommets. They electrically protect wires and cables passing through panels and ensure a good resistance against dust.

Grommets with central perforated membrane


- Material: lead-free PVC and DEHP (complies with directive 2002/95/CE - RoHS)
- Colour: black
- Continuous operating temperature: -40°C ÷ +150°C
- Hardness: 50 shore A (ISO 768)

Grommets central membrane cross - DIMENSIONS (mm)

Front view




Side view





Grommets central perforated membrane - DIMENSIONS (mm)

Front view



Side view

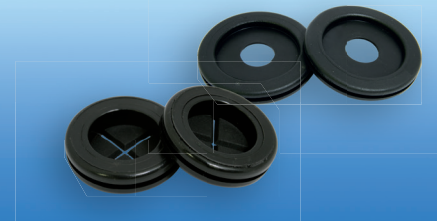

Cross	Code	Model	Hole diameter (A) for mounting (mm)	Maximum diameter grommet (D) mm	Hole diameter (d) cable passage (mm)	Sheet thickness (B) mm	Maximum thickness grommet (H) mm
	VE783000	10481	27	35	22	2	8
	VE783100	10723	21	28	16	2	8
	VE783200	10731	28	34.5	21	1	8
Perforated							
	VE783300	10670	15	19	4	1.5	8
	VE783400	10671	15	19	4	3	9.5
	VE783500	10672	15	19	4	4	10.5
	VE783600	10680	21	28	6.5	2	8
	VE783700	10681	21	28	6.5	3	9
	VE783800	10682	21	28	6.5	4	10
	VE783900	10689	21	28	11	3	9