


Temperature Probes

Cr-Al (K)

Cr-Al (K) length 3 mt

Sensor series aimed at detecting the Temperature. Designed to obtain a fast response and built according to criteria that ensure high reliability and duration over time.
Signal transmitted: mV

- Sensor type: thermocouple
- Terminal: sensor in AISI 304 stainless steel capsule
- Length / cable type: 3 m / Flexible insulated cable made of linked glass fibre, filled in with glass fibre and external weaving with tinned copper braids
- The output of the cable of the capsule is protected by a stainless steel spring
- To extend the probe cable use a compensated cable
- Precision: according to IEC 584 class 2
- Hot joint connected to the external weaving (lower response time to the variations in temperature)
- Thermocouple 2 wires

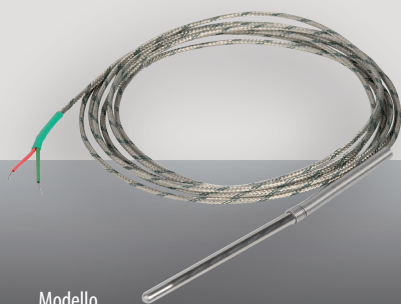

Codice	Modello
VJ44410000	Cr-Al (K)

GENERAL CHARACTERISTICS

Sensor operative range	°C	-50 ÷ +400
Operative range (sensor + cable)	°C	0 ÷ +400
Degree of protection	IP	40

DIMENSIONS (mm)

